
KENAY KUSTOMS

Installation guide for

LC-200-RH

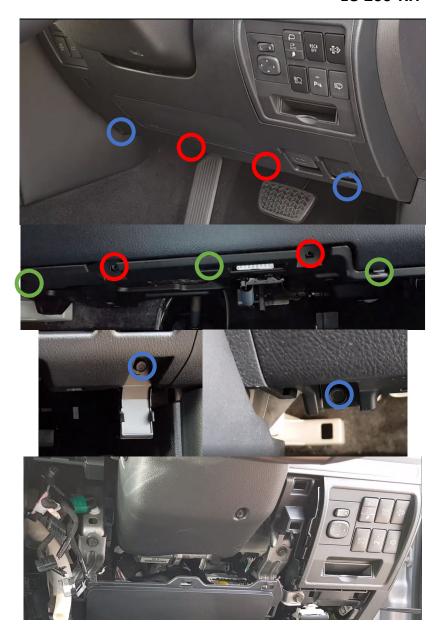

There is a total of 4 screws to remove in this install.

1. Undo the 2 screws marked -Drop the lower tray by gently unclipping the 3 clips marked and unplug connector.

2. Pry open the plastic flap covering screw on drivers' side

if using a flat head screwdriver or anything metal wrap in a cloth to avoid damage

3. Undo the 2 screws marked

- 4. Gently pull fascia away from dashboard undoing wiring connectors to gain access to switch panel
- 5. Remove switch panel by pulling away from dashboard

The team at Kenay Kustoms thank you for your purchase :)

Please share some pics with us when you have it all installed!

For support please contact us on Facebook, Instagram, email, phone or our website. Thank you

